



# NewLife Surgical Works



An ISO 9001:2008 Certified Company

### Contact Us

**Head Office:- NewLife Surgical Works**

**Contact Person :** Mr Sumit Aneja (Managing Director )  
Mobile: + 91 9910066785,  
**Kanika Aneja**  
(Sales Executive Export)  
Mobile:- +91 99587 02883

**Address :** 1681/4, Bhagirath Palace, Chandni Chowk,  
Delhi - 110006 (INDIA)

**E-mail :** [sumitaneja000@gmail.com](mailto:sumitaneja000@gmail.com)  
[kanikaaneja088@gmail.com](mailto:kanikaaneja088@gmail.com)  
[osteosintesis.traumatologia@gmail.com](mailto:osteosintesis.traumatologia@gmail.com)  
[sumit\\_aneja007@yahoo.co.in](mailto:sumit_aneja007@yahoo.co.in)  
[business@newlifeorthopaedic.com](mailto:business@newlifeorthopaedic.com)  
[sumitaneja@newlifeorthopaedic.com](mailto:sumitaneja@newlifeorthopaedic.com)

**Mobile No:** +(91)-9910066785 / 9717303826 /  
9958702883

**Phone :** +(91)-(11)-2584 6785, 2584 6780, 25840275



WhatsApp Connect  
+91-9910066785

WhatsApp Connect  
+91-9958702883

Call Us on +91-9910066785

INDIAN FDA APPROVED COMPANY

AN ISO 13485 : 2016 COMPANY



# NewLife Surgical Works

An ISO 9001 : 2008 & CE Certified Company


**MR. SUMIT ANEJA**

+919910066785

[sumitaneja000@gmail.com](mailto:sumitaneja000@gmail.com)

[osteosintesis.traumatologia@gmail.com](mailto:osteosintesis.traumatologia@gmail.com)

ARTHROSCOPIC IMPLANTS



# SWISS IMPLANTS®

IMPLANTING WITH PRECISION



Newlife Surgical Works



An ISO 9001:2008 Certified Company

Кот. Нет.	день.	Размер
T202.0720	07 MM	20
T202.0725	07 MM	25
T202.0730	07 MM	30
T202.0735	07 MM	35
T202.0820	08 MM	20
T202.0825	08 MM	25
T202.0830	08 MM	30
T202.0835	08 MM	35
T202.0920	09 MM	20
T202.0925	09 MM	25
T202.0930	09 MM	30
T202.0935	09 MM	35



Cat. No.	Dia.
T205.03	03 MM
T205.05	05 MM




Cat. No.	Dia.
T206.08	08 MM
T206.10	10 MM



Cat. No.	Dia.	Size
T207.25	6.5 MM	25
T207.30	6.5 MM	30
T207.35	6.5 MM	35


3701 ACL JIG

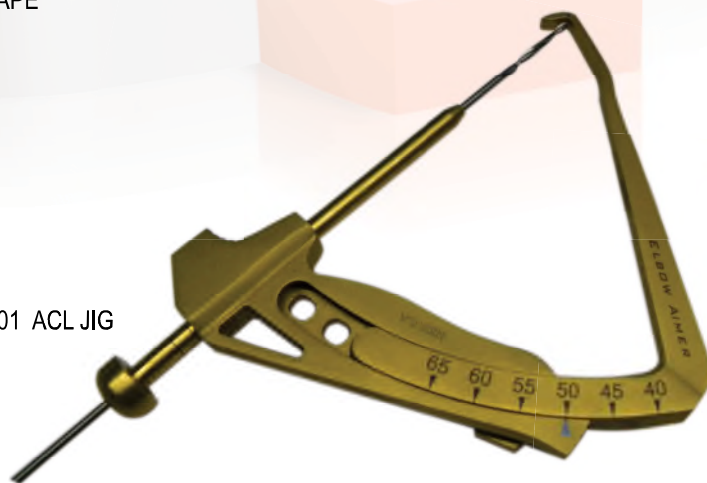


3702.T PCL TIBIAL JIG



3702.F PCL FEMORAL JIG

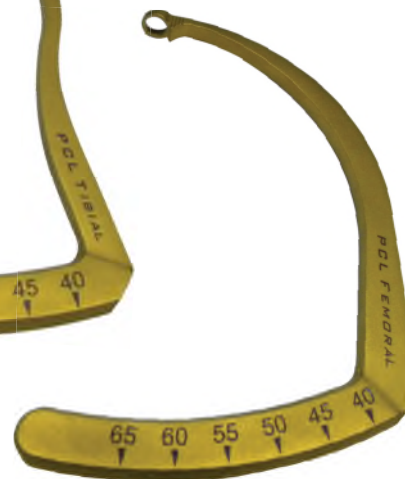

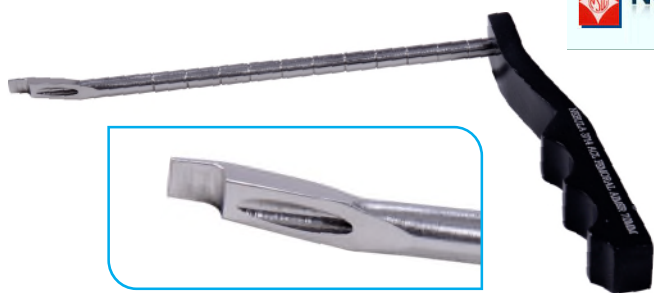

3714 БЕДРЕННОЙ ЛЮБОВЬ С OFFSET  
Размер :- 05,07 mm



3715 ТУННЕЛЬНАЯ ПЛИТА  
Размер :- 7-8,8-9,9-10 mm




3717 ТУННЕЛЬ ДИЛАТОР ТВЕРДЫЙ  
Размер :- 07, 08, 09 mm

3718 Т РУЧКА ДЛЯ  
ТЮНЕЛЬ ДИЛАТОР



3719 ДИАМЕТР ЭКЗАМЕНА



3720 Рашпиль



Straight



Convex



3721 ФЕМОРАЛЬНЫЙ ЛИФЛ PCL



3722 ГРАФИЧЕСКИЙ ПРОХОД БУРОВОЙ ДРЕВЕСИНЫ  
2.3 mm



NewLife Surgical Works

An ISO 9001 : 2008 & CE Certified Company



3707 БЛОК ИЗМЕРЕНИЯ ГРАФСТВА  
(06 mm To 12 mm)



3708 BEATH PIN  
2.3 mm



Drill Tip



Diamond Tip



3709 ГЛУБИНОМЕР

3710 ВИНТОВОЙ ВИНТ 4,5 мм  
С.С. (Для винтов с помехами)



3712 TENDON STRIPER  
Size:- 06,07,08 mm




Close



Open



3713 MICRO FRACTURE AWL  
30,45,90 Degree

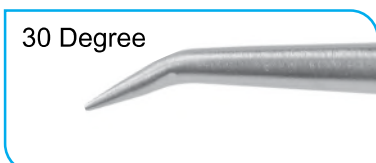

30 Degree



45 Degree



90 Degree



NewLife Surgical Works


An ISO 9001 : 2008 & CE Certified Company




3703 ACL ДЕМОНСТРИРУЙТЕСЬ  
КОНСЕРВИРОВАННЫЙ ЦВЕТОЧНЫЙ СОВЕТ  
DIA.:- 06 mm To 12 mm



3704 ACL ТИБИЛЬНЫЙ РЕЙМЕР  
КНОПАННЫЙ  
DIA.:- 06 mm To 12 mm



3705 ЭНДОСКОПИЧЕСКИЕ КАМЕННЫЕ  
РЕАМЕР 4.5 мм

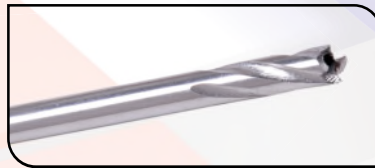

3706 ГЛАВНЫЙ СОВЕТ GRAFT



TISSUE GRASPER LONG



TISSUE GRASPER SHORT



SUTURE WISE WITH TENSIONMETER



SLIDER



SCALE




**Newlife Surgical Works**



An ISO 9001:2008 Certified Company



3724 ГРАФИЧЕСКИЙ СЛУЧАЙ ДЛЯ  
АРТРОСКОПИЧЕСКИЕ ИНСТРУМЕНТЫ

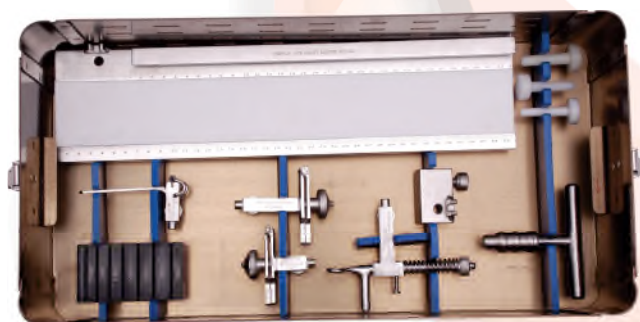

**Newlife Surgical Works**



An ISO 9001:2008 Certified Company



# NewLife Surgical Works

An ISO 9001 : 2008 & CE Certified Company

# ALbutton CL Advanced Femoral Fixation Knee System



## Contact Us

**Head Office:- NewLife Surgical Works**

**Contact Person :** Mr Sumit Aneja (Managing Director )  
Mobile 📞 + 91 9910066785,  
Kanika Aneja  
(Sales Executive Export)  
Mobile:- +91 99587 02883


**Address :** 1681/4, Bhagirath Palace, Chandni Chowk,  
Delhi - 110006 (INDIA)


**E-mail :** [sumitaneja000@gmail.com](mailto:sumitaneja000@gmail.com)  
[kanikaaneja088@gmail.com](mailto:kanikaaneja088@gmail.com)  
[osteosintesis.traumatologia@gmail.com](mailto:osteosintesis.traumatologia@gmail.com)  
[sumit\\_aneja007@yahoo.co.in](mailto:sumit_aneja007@yahoo.co.in)  
[business@newlifeorthopaedic.com](mailto:business@newlifeorthopaedic.com)  
[sumitaneja@newlifeorthopaedic.com](mailto:sumitaneja@newlifeorthopaedic.com)


**Mobile No:** +(91)-9910066785 / 9717303826 /  
9958702883


**Phone :** +(91)-(11)-2584 6785, 2584 6780, 25840275



 **WhatsApp Connect**  
+91-9910066785

 **WhatsApp Connect**  
+91-9958702883

 **Call Us on** +91-9910066785



# SWISS IMPLANTS®

IMPLANTING WITH PRECISION

INDIAN FDA APPROVED COMPANY  
AN ISO 13485 : 2016 COMPANY

## Arthroscopy Ligament (ALbutton CL)

We've continued to develop new ALbutton devices to meet your evolving needs.

Delivering improved strength and stiffness, the ALbutton CL device offers the strongest soft tissue femoral fixation currently available. ideal for anatomic or traditional ACL reconstruction techniques.

### ALbutton CL construct

Continuous loop of suture braid eliminates the need for knot tying and allows for a larger portion of graft to reside in the tunnel.

### Efficient

Preloaded with braided sutures (# 2 Bio fiber, white as leading wire and # 5 polyester, green as flipping wire) for added procedure efficiency.

### Higher strength

Tested for UTS-Ultimate Tensile Strength. Meets or exceeds 1500N. Highest failure load compared to competitive technologies.

### Truly endoscopic procedure

Does not require a second incision.

### Materials used



Femoral button : The loop is made of polyethylene, the two traction threads of polyester, and the plate is titanium grade-V (Ti6AL-4VELI) alloy.

The ALbutton is a fast way to obtain strong suture button fixation on cortical bone. The 15 mm to 35 mm long loop with titanium ALbutton pass through a small cortical pin hole without overdrilling, which saves time and preserves bone. The simplified measuring technique also reduces steps and improves sizing accuracy.

### Ordering Information

T203.L Tit. ALbutton with Loop

Loop Size : 15, 20, 25, 30, 35 mm Length

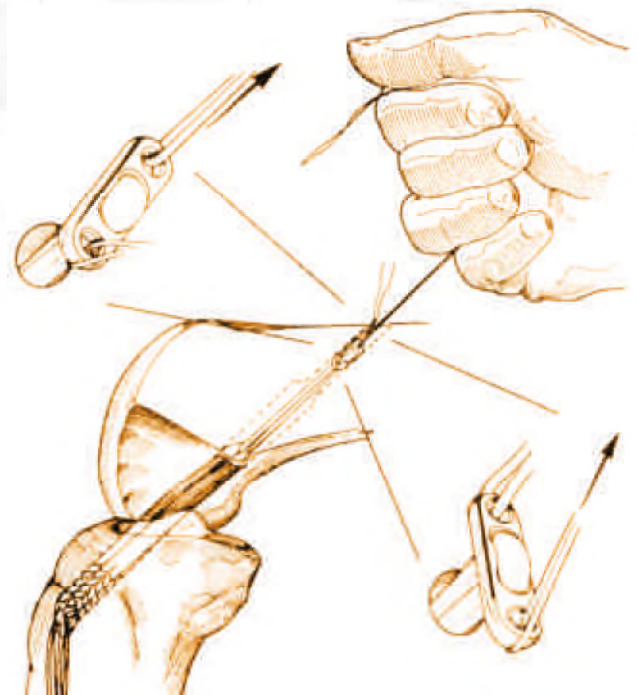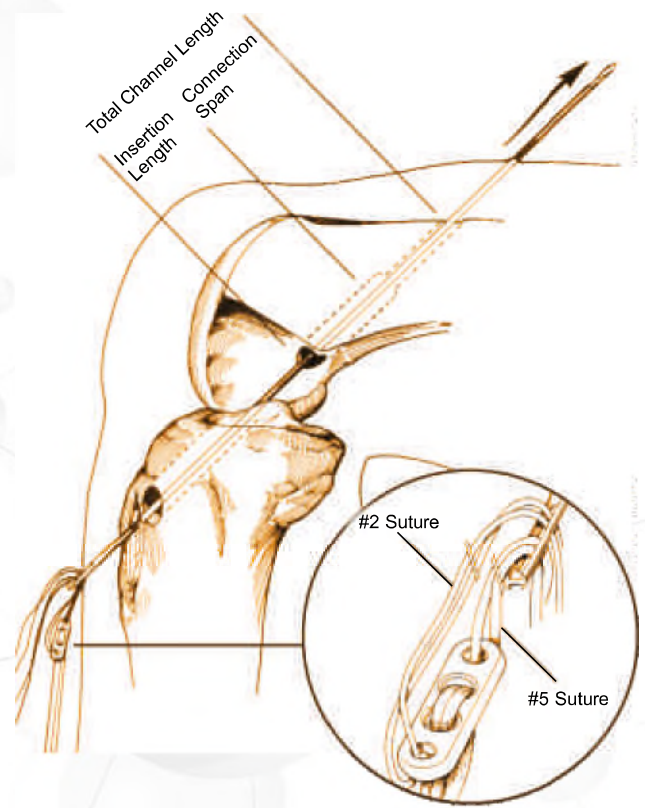

**Newlife Surgical Works**



An ISO 9001:2008 Certified Company



# Trauma Implant System



## NewLife Surgical Works

An ISO 9001 : 2008 & CE Certified Company



## SWISS IMPLANTS®

IMPLANTING WITH PRECISION

## A Jointless Joint

### Contact Us

#### Head Office:- NewLife Surgical Works

**Contact Person :** Mr Sumit Aneja (Managing Director )  
Mobile 📞 + 91 9910066785,  
Kanika Aneja  
(Sales Executive Export)  
Mobile:- +91 99587 02883

**Address :** 1681/4, Bhagirath Palace, Chandni Chowk,  
Delhi - 110006 (INDIA)

**E-mail :** [sumitaneja000@gmail.com](mailto:sumitaneja000@gmail.com)  
[kanikaaneja088@gmail.com](mailto:kanikaaneja088@gmail.com)  
[osteosintesis.traumatologia@gmail.com](mailto:osteosintesis.traumatologia@gmail.com)  
[sumit\\_aneja007@yahoo.co.in](mailto:sumit_aneja007@yahoo.co.in)  
[business@newlifeorthopaedic.com](mailto:business@newlifeorthopaedic.com)  
[sumitaneja@newlifeorthopaedic.com](mailto:sumitaneja@newlifeorthopaedic.com)

**Mobile No:** +(91)-9910066785 / 9717303826 /  
9958702883

**Phone :** +(91)-(11)-2584 6785, 2584 6780, 25840275



WhatsApp Connect  
+91-9910066785



WhatsApp Connect  
+91-9958702883



Call Us on +91-9910066785



Length : 60 mm To 150 mm

Cat. 101

AUSTIN MOORE PIN WITH 2 NUTS



Length : 35 mm To 120 mm

Cat. 107

CANNULATED CANCELLOUS SCREW HEX  
Dia.: 6.5 mm, 7.0 mm (Fully Thread)



Cat. 102

Dia. : 37 mm To 55 mm

AUSTIN MOORE PROSTHESIS XL



Cat. 108

WASHER FOR C.C. & CANCELLOUS SCREW  
Small 4.0 mm, Large 6.5 mm



Cat. 103

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANNULATED CANCELLOUS SCREW HEX  
Dia.: 4.0 mm (16 mm Thread)



Cat. 109

Length : 50 mm To 120 mm

D.H.S. LEG SCREW (A.O. TYPE)



Cat. 104

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANNULATED CANCELLOUS SCREW HEX  
Dia.: 4.0 mm (Fully Thread)



Cat. 109,P

Length : 50 mm To 80 mm

PEDIATRIC D.H.S. LEG SCREW (A.O. TYPE)



Cat. 105

Length : 25 mm To 120 mm

CANNULATED CANCELLOUS SCREW HEX  
Dia.: 6.5 mm, 7.0 mm (16 mm Thread)



Cat. 110

Hole : 03 To 14

D.H.S. SHORT/LONG BARREL PLATE (ROUND HOLE) A.O. TYPE  
Angle : 120° To 150°



Cat. 106

Length : 6.5 mm :- 35 mm To 120 mm  
7.0 mm :- 40 mm To 125 mm

CANNULATED CANCELLOUS SCREW HEX  
Dia.: 6.5 mm, 7.0 mm (32mm Thread)



Cat. 111

Hole : 03 To 12

D.H.S. LONG/SHORT BARREL PLATE (D.C.HOLE) A.O. TYPE  
Angle : 125° To 140°



Cat. 111.P

Hole : 03 To 06

D.H.S. PEDIATRIC PLATE (D.C.HOLE) A.O. TYPE  
Angle : 130° To 135°



Cat. 116

Hole : 05 To 14

95° D.C.S. BARREL PLATE (D.C. HOLE)



Cat. 112

Hole : 04,05,06

D.H.S. PLATE S.B./L.B. (TROCHANTERIC SUPPORT) ROUND HOLE  
Angle : 130° To 135°

## Plate For 3.5mm Screws



Cat. 117

Hole : 04 To 12

1/3 TUBULAR PLATE



Cat. 112.D

Hole : 04,05,06

D.H.S. PLATE S.B./L.B. (TROCHANTERIC SUPPORT) DC HOLE  
Angle : 130° To 135°



Cat. 118

Hole : 04 To 12

SMALL D.C. PLATE



Cat. 113

Hole : 05 To 16

95° CONDYLAR BLADE PLATE (ROUND HOLE) A.O. TYPE  
Blade Length : 60 mm To 80 mm



Cat. 118.H

Hole : 04 To 12

HOOK PLATE



Cat. 114

Hole : 05 To 16

95° CONDYLAR BLADE PLATE (D.C. HOLE) A.O. TYPE  
Blade Length : 60 mm To 80 mm



Cat. 119

Hole : 04 To 12

SMALL L.C.D.C. PLATE



Cat. 115

Hole : 05 To 18

95° D.C.S. BARREL PLATE (ROUND HOLE)



Cat. 120

Hole : 02 To 06

ELLIS PLATE



Cat. 121.03

SMALL "T" PLATE ( HEAD 03 HOLE )

Hole : 02 To 08



Cat. 123.S

PELVIC SYMPHYSEAL PLATE 3.5 MM  
For 3.5 mm Screw

Hole : 04 , 06 Hole



Cat. 121.04

SMALL "T" PLATE ( HEAD 04 HOLE )

Hole : 02 To 08



Cat. 124

RECONSTRUCTION PLATE (D.C. HOLE)  
For 3.5 mm screw

Hole : 03 To 16



Cat. 122

OBLIQUE "T" PLATE

Hole : 02 To 08



Cat. 124.C

RECONSTRUCTION PLATE CURVED (D.C. HOLE)  
For 3.5 mm screw

Hole : 04 To 14  
(2 Hole Variation)



Cat. 123

RECONSTRUCTION PLATE (ROUND HOLE)  
For 3.5 mm Screw

Hole : 03 To 16



Cat. 123.PC

PELVIC CURVED PLATE 3,5 MM  
For 3.5 mm Screw

Hole : 04 To 14  
(2 Hole Variation )





Cat. 125

Hole : 04 To 12

SEMI TUBULAR PLATE



Cat. 130.H

Hole : 04 To 10

T BUTTRESS PLATE (HUMERUS)



Cat. 126

Hole : 04 To 14

NARROW D.C. PLATE



Cat. 131

Hole : 03 To 12

L BUTTRESS PLATE LEFT & RIGHT



Cat. 127

Hole : 04 To 14

NARROW L.C.D.C. PLATE



Cat. 132

Hole : 04 To 12

LATERAL TIBIAL PLATE LEFT & RIGHT



Cat. 128

Hole : 06 To 16

BROAD D.C. PLATE



Cat. 133

Hole : 05 To 12

COBRA PLATE



Cat. 129

Hole : 06 To 12

BROAD L.C.D.C. PLATE



Cat. 134

Hole : 04 To 12

CLOVERLEAF PLATE



Cat. 130

Hole : 03 To 12

T BUTTRESS PLATE



Cat. 135

Hole : 04 To 16

CONDYLAR BUTTRESS PLATE LEFT & RIGHT



Cat. 136

Hole : ( 3 X 3 X 3 To 3 X 3 X 10 )  
( 4 X 4 X 4 To 4 X 4 X 10 )

SHERMAN Y PLATE



Cat. 137

Hole : 03 To 16

RECONSTRUCTION PLATE (ROUND HOLE)  
For 4.5 mm screw



Cat. 138

Hole : 03 To 16

RECONSTRUCTION PLATE (D.C. HOLE)  
For 4.5 mm screw



Cat. 139

Length : 12 mm To 60 mm  
65 mm To 85 mm

CORTICAL SCREW HEX  
Dia.: 3.5mm (20 T. P. I.)



Cat. 145

Length : 35 mm To 120 mm

CANCELLOUS SCREW HEX  
Dia. 6.5 mm (32 mm Thread)



Cat. 140

Length : 12 mm To 50 mm

CORTICAL SCREW HEX  
Dia.: 3.5mm (14 T. P. I.)



Cat. 146

Length : 35 mm To 120 mm

CANCELLOUS SCREW HEX  
Dia. 6.5 mm (Fully Thread)



Cat. 141

Length : 16 mm To 70 mm

CORTICAL SCREW HEX  
Dia.: 4.5mm (14 T. P. I.)



Cat. 147

Length : 25 mm To 100 mm

MALLEOLER SCREW HEX  
Dia.: 4.5 mm



Cat. 142

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANCELLOUS SCREW HEX  
Dia.: 4.0 mm (16 mm Thread)



Cat. 143

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANCELLOUS SCREW HEX  
Dia. 4.0 mm (Fully Thread)



Cat. 144

Length : 25 mm To 120 mm

CANCELLOUS SCREW HEX  
Dia. 6.5 mm (16 mm Thread)



Bolt For Interlocking Nail

Intramedullary Nail



Cat. 148

I.L. BOLT 2.9 mm HEX  
For 6 mm Humerus I.L. Nail

Length : 16 mm To 30 mm  
32 mm To 44 mm



Cat. 154

INTERLOCKING NAIL FOR HUMERUS IN 1 C.M. VARIATION  
(SOLID & CANULATED)  
Dia.: 6,7,8 mm

Length : 20 cm To 30 cm



Cat. 149

I.L. BOLT 3.4 mm HEX  
For 7, 8 mm Humerus I.L. Nail

Length : 20 mm To 32 mm  
34 mm To 50 mm



Cat. 155.13

INTERLOCKING NAIL FOR TIBIA IN 1 C.M. VARIATION  
(13 mm Design)  
Dia. 08 mm To 11 mm

Length : 28 cm To 38 cm



Cat. 150

I.L. BOLT 3.9 mm HEX  
For 08 mm I.L. Nail

Length : 20 mm To 34 mm  
36 mm To 60 mm



Cat. 155.D

INTERLOCKING NAIL FOR TIBIA (DISTAL JIG)  
IN 1.5 C.M. VARIATION  
Dia. 08 mm To 11 mm

Length : 285 mm To 405 mm



Cat. 151

I.L. BOLT 4.9 mm HEX  
For 09 mm To 13 mm I.L. Nail

Length : 20 mm To 100 mm



Cat. 156.13

INTERLOCKING NAIL FOR FEMUR IN 2 C.M. VARIATION  
(13 mm Design)  
Dia. 09 mm To 12 mm

Length : 34 cm To 44 cm



Cat. 152

HERBERT SCREW  
(HEAD - 4.5 mm & TAIL - 3.5 mm)

Length : 12 mm To 34 mm



Cat. 156.D

INTERLOCKING NAIL FOR FEMUR IN 1.5 C.M. VARIATION  
(DISTAL JIG)  
Dia. 09 mm To 12 mm

Length : 330 mm To 450 mm



Cat. 153

CAP FOR HUMERUS NAIL

Length : 00 mm, 05 mm



Cat. 157

RE-CON NAIL - RIGHT & LEFT IN 2 C.M. VARIATION  
Dia.: 09 mm To 12 mm

Length : 34 cm To 44cm





Cat. 157.S

Length : 22 cm

SHORT RE-CON NAIL  
Dia.: 09 mm To 12 mm



Cat. 158

Length : 34 cm To 44 cm

K - NAIL FOR FEMUR  
Dia.: 08 mm To 12 mm



Cat. 160

Length : 18 cm To 34 cm

RUSH NAIL  
Dia.: 1.5 mm To 4.0mm



Cat. 161

Length : 18 cm To 34 cm

SQUARE NAIL FOR RADIUS & ULNA  
Dia.: 2.0 mm TO 4.0 mm



Cat. 162

Length : 14 cm To 46 cm

ENDER'S NAIL  
Dia.: 2.0 mm To 4.5 mm



Cat. 165

Hole : 05, 08, 11

CERVICAL H SPINAL PLATE



Cat. 166

Length : 04", 06", 09", 12"

"K" WIRE (DOUBLE ENDED)  
Dia.: 0.8 mm To 3.0 mm



Cat. 165.W

WASHER SPIKE



Cat. 167

Length : 06" , 09"

THREADED "K" WIRE  
Dia.: 1.0 mm To 3.0 mm



Cat. 168

Length : 20 cm To 40 cm

"L" WIRE (LAMBRINUDI)  
Dia.: 1.5 mm To 4,5 mm



Cat. 169

Size : 16 swg To 26 swg

S.S. WIRE REEL



Cat. 171

Size : 0.8, 1.0, 1.2, 1.5 mm

CERCLAGE WIRE



Cat. 172

Length : 10 mm To 30 mm

"U" TYPE STAPLES  
Dia.: 1.5 mm To 3.0 mm



Cat. 174

Length : 06", 07", 09"

STEINMAN PIN  
Dia.: 3.0 To 4.5 mm • 5.0 To 6.0 mm



Cat. 173

COVENTARY STAPLES  
Small / Medium / Large



Cat. 174.D

S.T. PIN FOR DISTAL DEVICE  
Dia.: 2.5 , 3.0 , 3.5 mm



Cat. 175

Length : 09"

DENHAM PIN  
Dia.: 4.0 mm To 5.0 mm



Cat. 176

Length : 04" To 08"

SCHANZ SCREW  
Dia.: 2.0 mm To 5.0 mm



Cat. 176.C

Length : 09"

SCHANZ SCREW (CANCELLOUS THREAD 6.5 mm)  
Dia.: Shaft Dia. 4.5 mm (16<sup>th</sup> & 32<sup>th</sup>)



Cat. 176.S

Length : 06", 08"

SELF DRILLING SCHANZ SCREW  
Dia.: 4.5 mm, 5.0 mm



Cat. 176.T

Length : 06", 08"

TAPPER THREAD SCHANZ SCREW  
Dia.: 6.0 mm (32 & 52 Thread)



Cat. 178

Length : 50 mm To 120 mm

PROXIMAL BOLT 8,0 MM (FOR P.F.N., T.F.N. NAIL)



Cat. 177

Length : 10"

HIP TRACTION SCREW  
Dia.: 4.5,6.5,8.0 mm



Cat. 179

Length : 50 mm To 120 mm

PROXIMAL BOLT 6,4 MM  
(FOR P.F.N., T.F.N., RECON, CYRUS FEMUR NAIL)



Cat. 180

Length : 25 cm

PROXIMAL FEMORAL NAIL SHORT (P.F.N.)  
Dia. : 09, 10, 11, 12 mm (130° & 135°)



Cat. 180.L/R

Length : 34 cm To 44 cm

PROXIMAL FEMORAL NAIL LEFT & RIGHT (P.F.N.)  
Dia. : 09, 10, 11, 12 mm



Cat. 181

Length : 15 cm To 30 cm

SUPRA CONDYLAR NAIL (I.M.S.C.)  
Dia. : 10, 11, 12, 13 mm



Cat. 182

Length : 0 mm, 05 mm, 10 mm

CAP FOR RECON, P.F.N., I.M.S.C., CYRUS NAIL  
13mm DESIGN TIBIA & FEMUR NAIL



Cat. 183

Length : 0 mm, 05 mm, 10 mm

CAP FOR TIBIA & FEMUR NAIL



Cat. 189

Length : 18 cm

TROCHANTERIC FEMORAL NAIL (T.F.N.)  
Dia. 09, 10, 11, 12 mm (130° & 135°)



Cat. 184

Length : 28 cm To 38 cm

INTERLOCKING NAIL FOR TIBIA SOLID IN 2 C.M. VARIATION  
Dia.: 08,09,10 mm



Cat. 190

Length : 44 cm

ELASTIC NAIL  
Dia. 2.0, 2.5, 3.0, 3.5, 4.0, 4.5 mm



Cat. 185

Length : 34 cm To 44 cm

INTERLOCKING NAIL FOR FEMUR SOLID IN 2 C.M. VARIATION  
Dia.: 09 mm To 12 mm



Cat. 191

Length : 28 cm To 38 cm

MULTIFUNCTION TIBIA NAIL  
Dia. 08,09,10 mm



Cat. 186

Length : 28 cm To 38 cm

CYRUS TIBIA IN 2 C.M. VARIATION  
Dia. 08 mm To 10 mm



Cat. 192

Length : 60 To 120 mm

PROFAAN BLADE



Cat. 187

Length : 34 cm To 44 cm

CYRUS FEMUR IN 2 C.M. VARIATION (LEFT & RIGHT)  
Dia. 09 mm To 12 mm



Cat. 193

Length : 170,200,240 mm

PROFAAN 130\*  
Dia. :- 09 To 12 mm



Cat. 188

Length : 28 cm To 38 cm

TIBIA NAIL (UPPER BEND)  
Dia. 08 mm To 10 mm



Cat. 193.L/R

Length : 32 To 44 cm

PROFAAN LONG 130\*  
Dia. :- 09 To 12 mm



Cat. S101/T101

Hole : 02 To 20

MINI STRAIGHT PLATE (WITHOUT GAP)



Cat. S107/T107

MINI "X" PLATE



Cat. S101.G/T101.G

Hole : 02 To 10

MINI STRAIGHT PLATE (WITH GAP)



Cat. S108/T108

MINI "Z" PLATE (LEFT & RIGHT)

Hole : 04



Cat. S102/T102

Hole : 02 To 03

MINI "T" PLATE SMALL (WITH HEAD 2 HOLE & 3 HOLE)



Cat. S109/T109

MINI CURVED PLATE (LEFT & RIGHT)

Hole : 04 , 06



Cat. S103/T103

Hole : 02 To 03

MINI "L" PLATE 90° (LEFT & RIGHT)



Cat. S110/T110

MINI ANGULAR PLATE 150° (LEFT & RIGHT)

Hole : 04,06



Cat. S105/T105

Hole : 06

MINI "I" PLATE



Cat. S111/T111

MINI ORBITA PLATE (WITH GAP)

Hole : 04 , 06



Cat. S106/T106

Hole : 5 To 6

MINI "Y" PLATE (SINGLE & DOUBLE)



Cat. S112/T112

MINI ORBITA PLATE (WITHOUT GAP)

Hole : 04 , 06



Cat. S113/T113

Hole : 02 To 20

MINI RECONSTRUCTION PLATE



Cat. S120/T120


Hole : 20 To 24

ANGLE RECONSTRUCTION PLATE LEFT & RIGHT



Cat. S114/T114

MINI NOSE PLATE ("H" SHAPE)



Cat. S122/T122

1" X 1"

WIRE MESH



Cat. S114/T114

MINI NOSE PLATE ("Y" SHAPE)



Cat. S123

1 FEET

ARCH BAR



Cat. S115/T115

MINI 3D SQUARE PLATE



Cat. S116/T116

MINI CHIN PLATE



Cat. S117

Hole : 04 To 10

DYANAMIC COMPRESSION PLATE (D.C.P.)  
PLATE FOR 2.5 & 2.7 MM SCREW



# Mini Plate & Screw (Dai. 1.5,2.0,2.5 mm)

# External Fixator



Cat. S130/T130  
MINI SCREW 1.5 mm SLOT

Length : 04 mm To 12 mm



Cat. 201.001  
AESCULAP CLAMP

Size : 4.5 X 8.0 mm



Cat. S131/T131  
MINI SCREW 2.0 mm SLOT (32 TPI)

Length : 04 mm To 14 mm



Cat. 201.002  
ROD TO ROD CLAMP

Size : 8.0 X 8.0 mm



Cat. S132/T132  
MINI SCREW 2.5 mm SLOT (32 TPI)

Length : 06 mm To 16 mm



Cat. 201.003  
CONNECTION ROD  
Dia.: 8.0 mm

Size : 04" TO 16"



Cat. S133  
I.M.F. (INTRA MAXILLARY FIXATION ) SCREW SLOT

Length : 06mm To 14mm



Cat. 202.001  
AESCULAP CLAMP

Size : 2.5 X 4.0 mm



Cat. S134/T134  
MINI SCREW 2.5 mm HEX (24 TPI)

Length : 08 mm To 30 mm



Cat. 202.002  
AESCULAP CLAMP

Size : 4.0 X 4.0 mm



Cat. S134/T134  
MINI SCREW 2.7 mm HEX (24 TPI)

Length : 10 mm To 34 mm



Cat. 202.003  
CONNECTION RODS  
Dia.: 4.0 mm

Size : 4" To 16"





Cat. 203.001

Size : 4.5 X 11 mm

A.O. TYPE CLAMP



Cat. 203.006

UNIVERSAL JOINT FOR TWO ROD



Cat. 203.002

Size : 11 X 11 mm

ROD TO ROD CLAMP



Cat. 203.007

TRANSVERSE CLAMP PIN ADJUSTABLE



Cat. 203.003

Length : 6" To 18"

CONNECTION RODS  
Dia.: 11 mm



Cat. 203.009

Size : FOR 4.5 & 6.0 mm

T-HANDLE FOR SCHANZ SCREWS / STEINMAN PIN



Cat. 203.004

Size : 4.5 X 11 mm

A. O. TYPE DOUBLE PIN CLAMP



Cat. 203.011

THREADED ROD WITH 3 TUBE & NUTS (D.A.)



Cat. 203.005

Size : 4.5 X 11 mm

OPEN CLAMP



Cat. 204.001

A. O. TYPE CLAMP

Size : 2.5 X 4.0 mm



Cat. 203.006C

UNIVERSAL JOINT WITH 2 CLAMP



Cat. 204.002

A. O. TYPE CLAMP

Size : 3.5 X 4.0 mm



Cat. 204.003  
A. O. TYPE CLAMP

Size : 4.0 X 4.0 mm



Cat. 207  
HALF RING

Length : 80 mm To 220 mm




Cat. 205.001  
BALL TYPE CLAMP



Cat. 209  
5/8 RING

Length : 130 mm To 200 mm



Cat. 205.002  
DISTRACTOR UNIT

Length : 6" To 12"



Cat. 210  
ITALIAN FEMORAL ARCHES  
Angle :- 90°, 120°

Length : 140 mm To 200 mm



Cat. 205.003  
BALL & SOCKET SPANNER



Cat. 211  
THREADED ROD (06 mm)

Length : 100 mm To 400 mm



Cat. 212  
TELESCOPIC ROD

Length : 100 mm To 250 mm



Cat. 213.001  
HINGES (MALE END 1 HOLE)



Cat. 213.002  
HINGES (FEMALE END 1 HOLE)



Cat. 217.S  
SHORT CONNECTION PLATE  
Hole : 02 To 07



Cat. 213.003  
90 DEGREE HINGES



Cat. 217.L  
LONG CONNECTION PLATE  
Hole : 08 To 10



Cat. 214.M  
POST MALE

Hole : 01 To 04



Cat. 217.T  
TWISTED PLATE  
Hole : 01 To 03



Cat. 214.F  
POST FEMALE

Hole : 01 To 04



Cat. 218.001  
CONNECTING BOLT



Cat. 215  
OBLIQUE SUPPORT



Cat. 218.002  
NUT



Cat. 216  
CURVED PLATE



Cat. 218.002.S  
SQUARE NUT



Cat. 218.003

WIRE FIXATION BOLT (SIDE SLOTTED)



Cat. 220

Length : 1.8 mm X 16"

TENSION K-WIRE (TROCER TIP & BIONET TIP)



Cat. 218.004

WIRE FIXATION BOLT (CENTRE HOLE)



Cat. 221

Length : 1.8 mm X 16"

OLIVE WIRE (BIONET & TROCER TYPE)



Cat. 218.005

MULTIPLE PIN FIXATION BOLT



Cat. 222.001

WASHER (SIMPLE)



Cat. 218.006

SINGLE PIN FIXATION BOLT

Size : For 4.5 & 6.0 mm



Cat. 222.002

WASHER (SLOTTED)



Cat. 218.008

WRENCHO CUBE

Hole : 01 To 04



Cat. 222.003

WASHER (CONICAL COUPLE)



Cat. 219.002

THREADED SOCKET

Size : 30 mm To 60 mm



Cat. 223.001

WIRE TENSIONERS (SIMPLE)



Cat. 223.002  
WIRE TENSIONERS (GRADUATED)



Cat. 206.001  
ALPHA CLAMP 06 X 10 mm



Cat. 224  
Length : 6 mm To 11 mm  
SPANNER ORDINARY



Cat. 206.002  
BETA CLAMP 08 X 12 mm



Cat. 225  
Length : 8,10,11 mm  
T-HANDLE SPANNER



Cat. 206.003  
BETA CLAMP 08 X 15 mm



Cat. 217.TE  
Size : 5H, 7H, 9H, 11H  
CONNECTION PLATE WITH THREADED END



Cat. 206.004  
BETA CLAMP AD ON



Cat. 206.005  
Length : 100 mm x 60 mm x 100 mm  
SINGLE PIN DISTRACTOR



Cat. 206.006  
Length : 100 mm x 150 mm  
200 mm  
DOUBLE PIN DISTRACTOR (M4)



# NewLife Surgical Works

An ISO 9001 : 2008 & CE Certified Company

MR. SUMIT ANEJA

+919910066785

sumitaneja000@gmail.com

osteosintesis.traumatologia@gmail.com



Cat. 206.006.B Length : 150 mm , 200 mm , 250 mm , 300 mm  
DOUBLE PIN DISTRACTOR (M6)



Cat. 206.012 Length : 200 mm , 250 mm , 300 mm  
350 mm , 400 mm  
STRAIGHT ROD 4.0 MM



Cat. 206.007 Length : 150 mm , 200 mm , 250 mm , 300 mm  
FISH MOUTH DISTRACTOR



Cat. 206.013 Size : 2.5 mm ( 35 x 35 mm )  
3.0 mm ( 50 x 50 mm )  
4.0 mm ( 75 x 75 mm )  
SMALL "L" ROD




Cat. 206.008 Length : 50 X 75 mm  
PIP DISTRACTOR



Cat. 206.014 Size : 2.5 mm ( 50 x 50 mm )  
3.0 mm ( 60 x 60 mm )  
4.0 mm ( 90 x 90 mm )  
LARGE "L" ROD



Cat. 206.009 Length : 75 mm , 100 mm , 150 mm  
STRAIGHT ROD 2.0 MM



Cat. 206.015 Size : 2.5 mm ( 60 x 45 x 60 mm )  
3.0 mm ( 80 x 50 x 80 mm )  
4.0 mm ( 100 x 60 x 100 mm )  
"Z" ROD



Cat. 206.010 Length : 75 mm , 100 mm , 150 mm  
200 mm , 250 mm  
STRAIGHT ROD 2.5 MM



Cat. 206.016 Dia : 2 , 3 mm  
ALLEN KEY



Cat. 206.011 Length : 100 mm , 150 mm , 200 mm  
250 mm , 300 mm  
STRAIGHT ROD 3.0 MM



# Eight Plate



Cat. T103

Length : 14 mm To 35 mm  
40 mm To 80 mm

TIT CANNULATED CANCELLOUS SCREW HEX ( C.C.SCREW )  
Dia.: 4.0 mm (16 mm Thread)



Cat. T104

Length : 14 mm To 35 mm  
40 mm To 80 mm

TIT CANNULATED CANCELLOUS SCREW HEX ( C.C.SCREW )  
Dia.: 4.0 mm (Fully Thread)



Cat. T142

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANCELLOUS SCREW HEX  
Dia.: 4.0 mm (16 mm Thread)



Cat. T143

Length : 14 mm To 35 mm  
40 mm To 80 mm

CANCELLOUS SCREW HEX  
Dia. 4.0 mm (Fully Thread)



Cat. T199  
Tit Eight Plate

Length : Small ,Medium, Large



Cat. T199.D  
Tit Eight Dynamic  
Compression PLate

Length : 12mm, 16mm, 20mm